
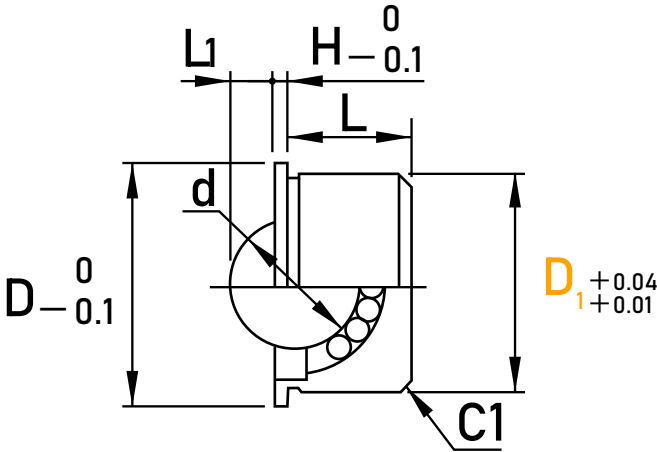


BCHA

Embedded type



■ product specification

D ₁	D	L	H	L ₁	d	Load N(kgf)	
						BCHA	BCHAJ
7.5	9	4	1	1.1	4	12 (1.2)	6 (0.6)
9	11	5	1	1.2	4.76	14 (1.4)	7 (0.7)
11	13	6	1	1.5	5.56	41 (4.2)	27 (2.8)
15	17	9	1	2.5	8.73	55 (5.6)	34 (3.5)
18	20	10	1	3.5	10.32	62 (6.3)	55 (5.6)
24	26	14	1.5	5.3	15.87	343 (35)	69 (7)
30	32	17	2	6.3	19.05	412 (42)	82 (8.4)


■ Optional materials



(BCHA stainless steel ball)(BCHAJ Pulpectate ball)

BCHF

flange type

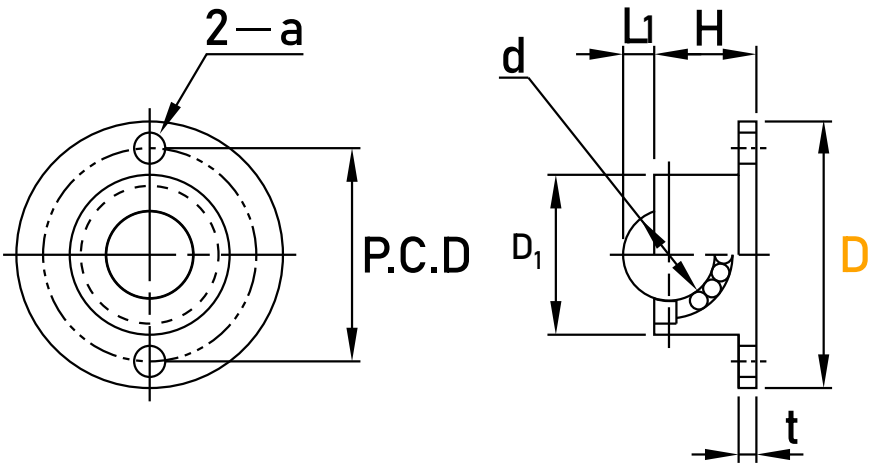


■ Optional material (stainless steel ball)

■ product specification


D	D ₁	L ₁	H	t	P.C.D	a	d	Load N(kgf)
27	15	2.5	9.5	2	21	3.5	8.73	55 (5.6)
30	18	3.5	11.5	2	24	3.5	10.32	62 (6.3)
39	24	5.3	14.7	3	31.5	4.5	15.87	343 (35)
48	30	6.3	18.7	4	39	5.5	19.05	412 (42)

BCHL

Hex bolt Type

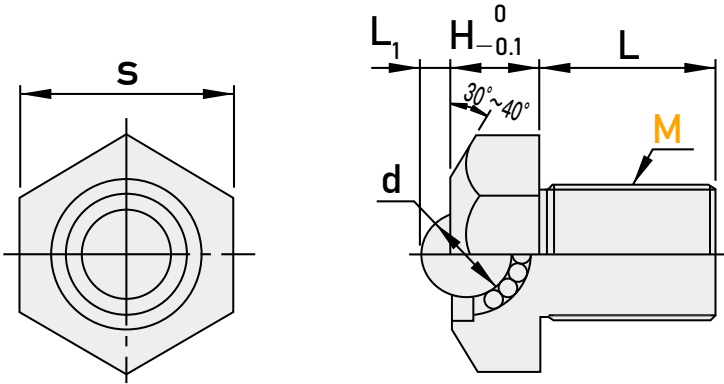

Optional materials

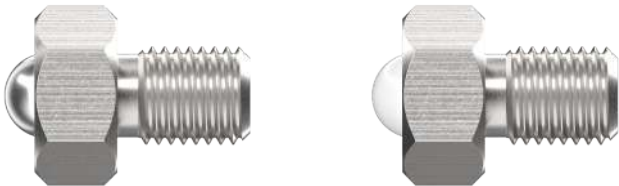



(BCHL stainless steel ball) (BCHLJ Pulpectate ball)

product specification

M	L	L ₁	H	d	s	Load N(kgf)	
						BCHL	BCHLJ
5	6	1.1	5	4	8	12 (1.2)	6 (0.6)
6	8	1.2	6	4.76	10	14 (1.4)	7 (0.7)
8	10	1.5	7	5.56	13	41(4.2)	27 (2.8)
10	12	2.5	10	8.73	17	55 (5.6)	34 (3.5)
12	15	3.5	11	10.32	19	62 (6.3)	55 (5.6)
16	20	5.3	15	15.87	24	343 (35)	69 (7)
20	22	6.3	18	19.05	30	412 (42)	82 (8.4)

BCHM

Round boltType

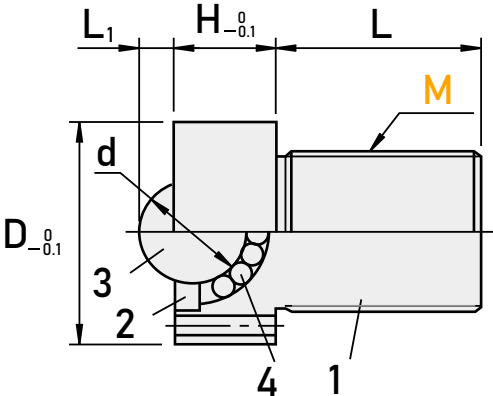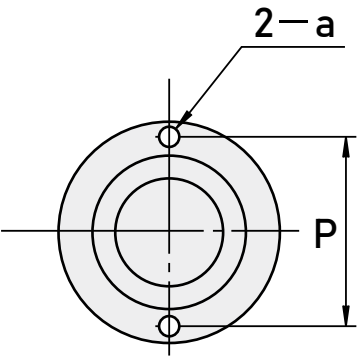

■ product specification



M	L	L ₁	H	D	d	a	P	Load N(kgf)
10	12	2.5	10	18.5	8.73	2	15.4	55 (5.6)
16	15	3.5	11	22	10.32	2	18.5	62 (6.3)
19	20	5.3	15	27	15.87	2.5	24	343 (35)
25	25	6.3	18	33	19.05	2.5	29.6	412 (42)

BCHN

Nut fixation Type



■ Optional material (stainless steel ball)

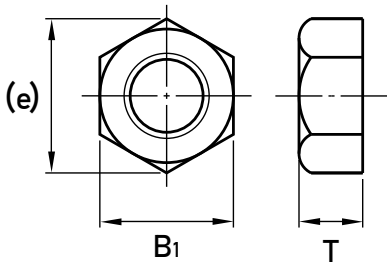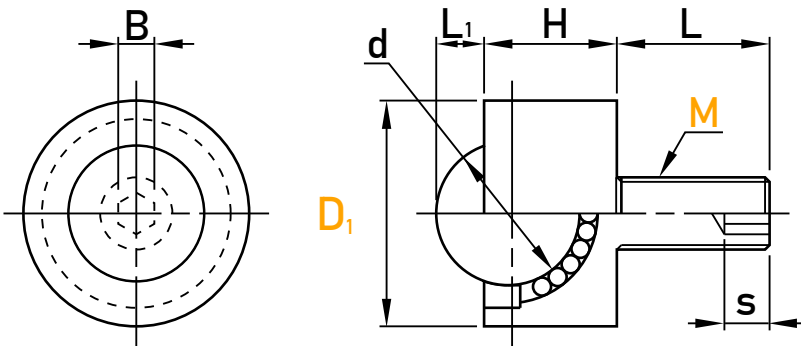

Nut parameters

M	B1	(e)	T
M6	10	11.5	5
M8	13	15	6.5
M10	17	19.6	8

■ product specification

D ₁	L ₁	H	M	L	d	B	s	Load N(kgf)
12	1.5	6.5	6	15	5.56	3	3.5	42 (4.2)
16	2.5	9.5	6	15	8.73	3	3.5	55 (5.6)
19	3.5	11.5	8	20	10.32	4	5	62 (6.3)
25	5.3	14.7	8	20	15.87	4	5	343 (35)
31	6.3	18.7	10	25	19.05	5	6	412 (42)

BCHP



plunger function Type



Optional material (stainless steel ball)



BCHP
(Embedded Type)

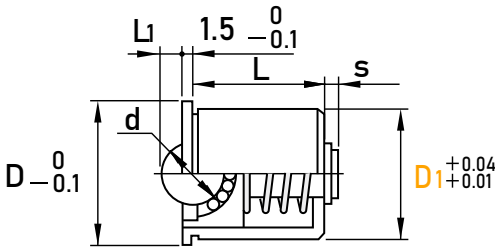


■ BCHP product specification

D ₁	D	L	L ₁	d	s	Load N	
						MIN.	MAX.
14	16	14	1.5	5.56	1.5	23	30
18	20	17	2.5	8.73	2	24	38
22	24	21.5	3.5	10.32	2	24	55



BCHPT
(External thread type)

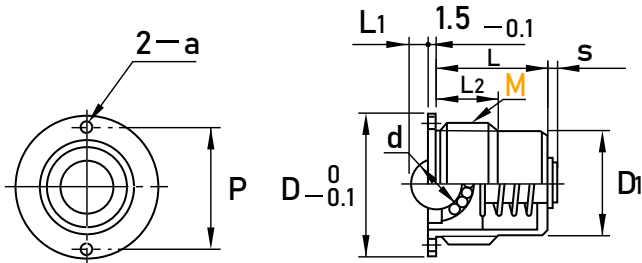

■ BCHPT product specification


M	D	D ₁	L	L ₁	L ₂	a	d	P	s	Load N	
										MIN.	MAX.
16	19	13.5	14	1.5	9	2	5.56	15.4	1.5	23	30
20	24	16.5	17	2.5	10	2	8.73	18.5	2	24	38
24	28	20.5	21.5	3.5	12	2.5	10.32	24	2	24	55

BCSB


Nut fixation Type




Optional material

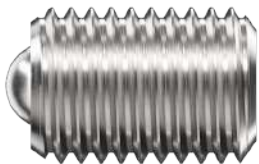

(BCSB stainless steel ball)

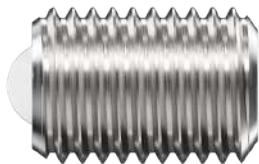

(BCSBJ Pulpectate ball)

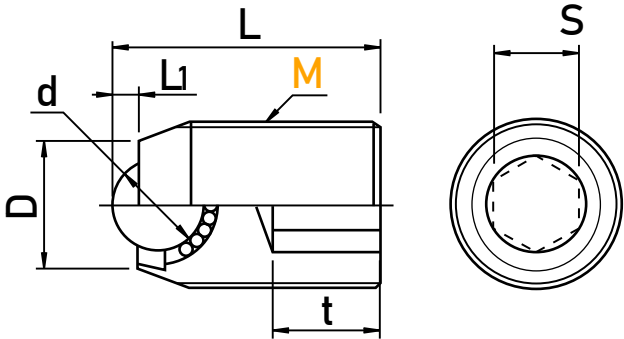

product specification

M	L	L ₁	D	d	s	t	Load N _(kgf)	
							BCSB	BCSBJ
6	12	0.9	3.5	3.18	3	3.5	2 (0.2)	0.5 (0.05)
8	14	1.3	5	4.76	4	5	5 (0.5)	1 (0.1)
10	16	1.2	7	4.76	5	6	14 (1.4)	7 (0.7)
12	20	1.5	8	5.56	6	8	41 (4.2)	27 (2.8)
16	25	2.5	12	8.73	8	10	55 (5.6)	34 (3.5)
20	30	3.5	15	10.32	10	12	62 (6.3)	55 (5.6)

BUHA

Embedded Type




■ Materials



(BUHA 24 stainless steel ball)

(Profile - Aluminum alloy anodized surface treatment)

■ product specification

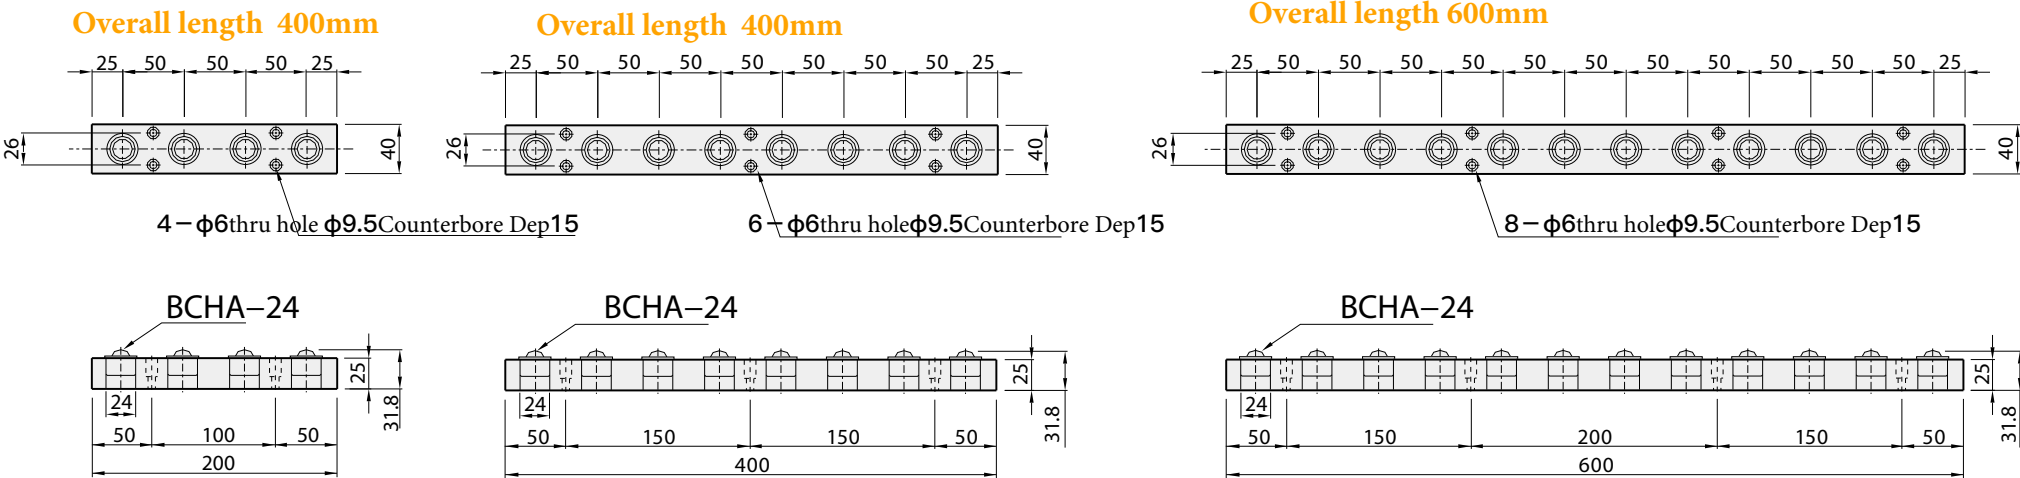

BUHL

Hex bolt Type



Materials



(BCHL 16 stainless steel ball)

(Profile - Aluminum alloy anodized surface treatment)

product specification

