

MS17984

304 Stainless Steel




Optional Handle Material



(304 Stainless Steel)



(aluminium alloy)

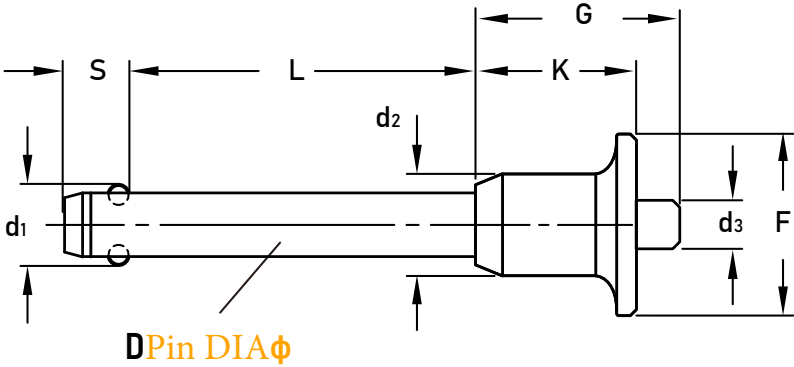


Spec	D ^{-0.02 -0.04}	F	d ₁	d ₂	d ₃	S	K
D5	5	18	5.54	10	4	6	21
D6	6	18	6.99	10	4	7	21
D8	8	20	9.42	13	5	8	21
D10	10	22	11.86	15	6	9	24
D12	12	24	14.45	16	6	10	24
D16	16	44	19	23.8	10	15	29
D20	20	44	24.08	23.8	10	17	29
D25	25	53	30.94	31.8	18	22	37
L (Sizes Opt)		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100					

MS17987

304 Stainless Steel





■ Aluminum Knob with Fixed Lanyard

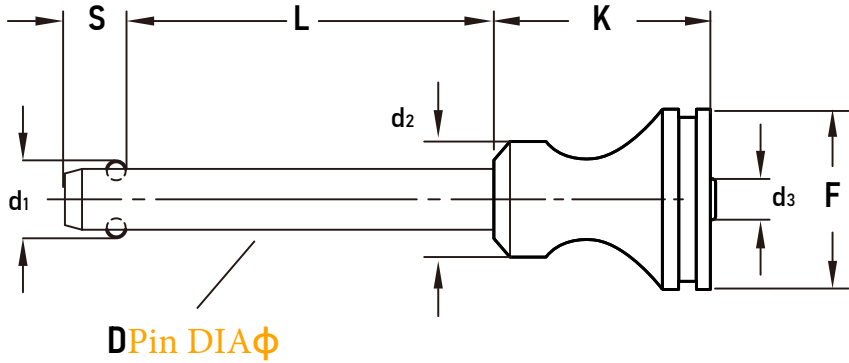

■ Spec	D ^{-0.02 -0.04}	F	d ₁	d ₂	d ₃	S	K
D5	5	18	5.54	10	4	6	21
D6	6	18	6.99	10	4	7	21
D8	8	20	9.42	13	5	8	21
D10	10	22	11.86	15	6	9	24
D12	12	24	14.45	16	6	10	24
D16	16	44	19	23.8	10	15	29
D20	20	44	24.08	23.8	10	17	29
D25	25	53	30.94	31.8	18	22	37
L (Sizes Opt)		10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100					

Pull Ring Type

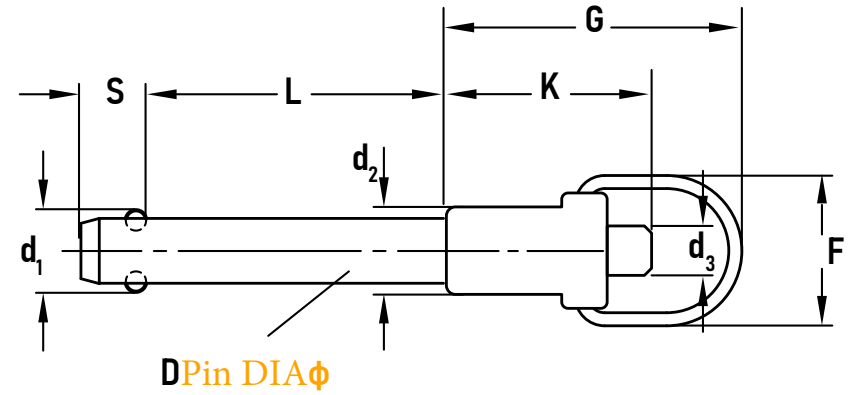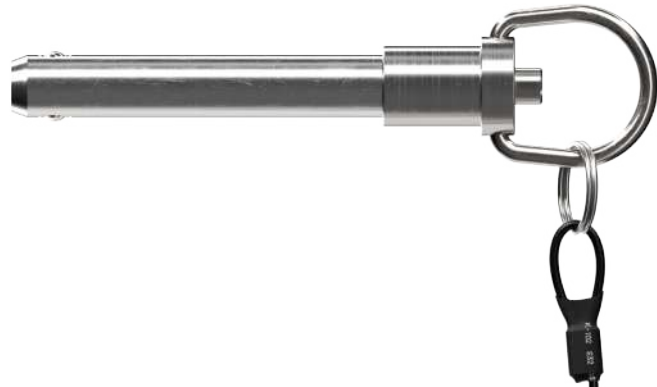


■ Spec	D ^{-0.02 -0.04}	F	d ₁	d ₂	d ₃	S	K	G
D5	5	26	5.54	12	5.9	6	28.5	46.5
D6	6	26	6.99	12	5.9	7	29	47
D8	8	26	9.42	12	5.9	8	29	47
D10	10	26	11.86	13	5.9	9	29	47
D12	12	29	14.45	16	7.9	10	30	47
D16	16	36	19	22	10.9	15	39.5	65
D20	20	41.7	24.08	23	10.9	17	41.3	67.3
D25	25	41.7	30.94	29.8	17.9	22	50.8	78.7
L (Sizes Opt)			10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100					

T-Handle Type

304 Stainless Steel




Aluminum Alloy handle with Lanyard

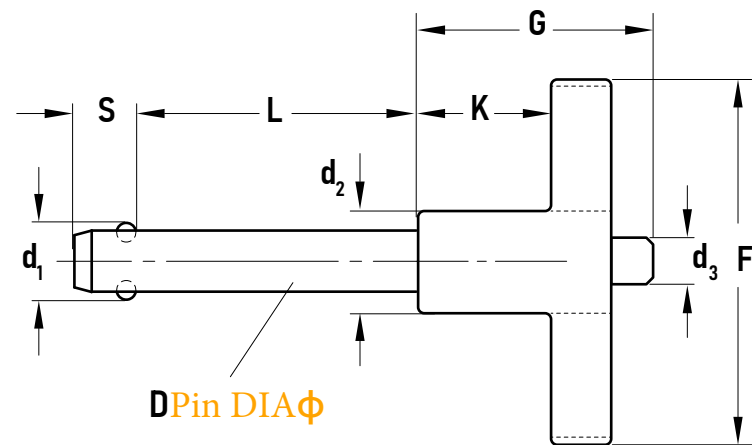

Spec	D ^{-0.02 -0.04}	F	d ₁	d ₂	d ₃	S	K	G
D5	5	46.1	5.5	13.1	5.8	7	18.5	31.3
D6	6	46.1	7	13.1	5.8	7	18.5	31.3
D8	8	46.1	9.5	13.1	5.8	8	18.5	31.3
D10	10	51.1	12	15	5.8	9	22.5	36.1
D12	12	51.1	14.5	15	7.9	10	22.5	36.1
D16	16	78.7	19	23.9	14	14	33.6	49.8
D20	20	78.7	24.08	23.9	14	19	33.6	49.8
D25	25	88.9	32	30	17.5	22	33.9	55.9
L (Sizes Opt)			10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100					

T-Handle Type

A handheld ultrasonic welding tool is shown against a white background. The tool consists of a black, L-shaped handle with a textured grip. A long, polished stainless steel probe extends from the handle. A black cable is connected to the handle. In the foreground, there is a separate metal component, likely a fixture or anvil, with a hook-like shape. The cable has a label that reads "K-102 E32".

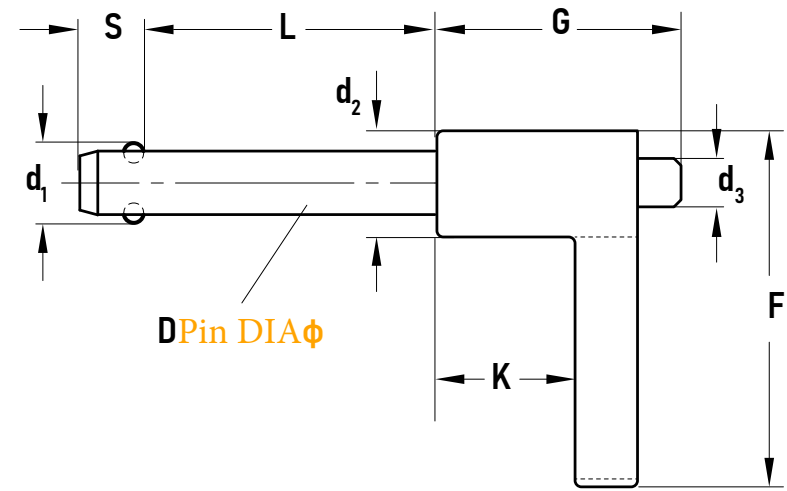

Spec	D ^{-0.02 -0.04}	F	d ₁	d ₂	d ₃	S	K	G
D5	5	44.9	5.5	13.1	5.8	7	18.5	31.3
D6	6	44.9	7	13.1	5.8	7	18.5	31.3
D8	8	44.9	9.5	13.1	5.8	8	18.5	31.3
D10	10	50.8	12	15	5.8	9	22.5	36.1
D12	12	57.2	14.5	15	7.9	10	22.5	36.1
D16	16	63	19	23.9	14	14	33.6	49.8
D20	20	63	24.08	23.9	14	19	33.6	49.8
D25	25	82.6	32	30	17.5	22	33.9	55.9
L (Sizes Opt)			10 / 15 / 20 / 25 / 30 / 35 / 40 / 45 / 50 / 55 / 60 / 65 / 70 / 75 / 80 / 85 / 90 / 95 / 100					